

# Internasional Journal Of Civil Engineering And Infrastructure

Volume 1 No. 2 October 2021

*NUMERICALLY PREDICTING SETTLEMENTS OF WASTE COCONUT FIBER (WCF) MIXED FLEXIBLE PAVEMENT IN HOMOGENEOUS SANDY SOIL BY USING PLAXIS 3D*  
Md. Foisal Haque

*UTILIZATION OF MADE AQUIFERS TO IMPROVE THE QUALITY OF CLEAN WATER TO DRINKING WATER*  
Mohammad Imamuddin / Acep Hidayat

*THE PERFORMANCE OF QUEUE LENGTH OF VEHICLE ON THE ROUNDABOUT AT SELAMAT DATANG MONUMENT USING PTV VISSIM*  
Harwidyo Eko Prasetyo / Andika Setiawan / Trijeti / Tanjung Rahayu R / Ayu Ramadhona

*BLACKSPOT IDENTIFICATION USING AEK AND BKA METHODS ON NATIONAL ROAD IN JAVA ISLAND*  
Shinta Novriani

*ANALYSIS OF REDUNDANT BUILDING CONSTRUCTION MATERIAL: A CASE STUDY FOR A HOSPITAL BUILDING PROJECT IN BOGOR*  
Aditya Gilang Rakasiwi / Trijeti / Rachmad Irwanto

*ADDITION OF SAND IN ARTIFICIAL AQUIFERS TO IMPROVE CLEAN WATER INTO DRINKING WATER*  
Mohammad Imamuddin

*NATURAL FREQUENCY OF SKEW PLATES USING FIRST-ORDER SHEAR DEFORMATION THEORY*  
Haryo Koco Buwono / Budiman

*THREE ARM UNSIGNALIZED INTERSECTION ON JALAN PERJUANGAN – JALAN KALIABANG BABELAN, NORTH BEKASI*  
Ardhan Rizakdy Fauzan / Harwidyo Eko Prasetyo / Andika Setiawan / Irnanda Satya Soeratmodjo



# International Journal of Civil Engineering and Infrastructure (IJCEI)

HOME ([HTTPS://JURNAL.UMJ.AC.ID/INDEX.PHP/IJCEI/INDEX](https://jurnal.umj.ac.id/index.php/ijcei/index)) ABOUT  
 ([HTTPS://JURNAL.UMJ.AC.ID/INDEX.PHP/IJCEI/ABOUT](https://jurnal.umj.ac.id/index.php/ijcei/about)) LOGIN  
 ([HTTPS://JURNAL.UMJ.AC.ID/INDEX.PHP/IJCEI/LOGIN](https://jurnal.umj.ac.id/index.php/ijcei/login)) REGISTER  
 ([HTTPS://JURNAL.UMJ.AC.ID/INDEX.PHP/IJCEI/USER/REGISTER](https://jurnal.umj.ac.id/index.php/ijcei/user/register)) CATEGORIES  
 Home (<https://jurnal.umj.ac.id/index.php/ijcei/index>) About Us (<https://jurnal.umj.ac.id/index.php/ijcei/about>)> **Editorial Team** (<https://jurnal.umj.ac.id/index.php/ijcei/about/editorial-team>) SEARCH  
 (<https://jurnal.umj.ac.id/index.php/ijcei/about/editorial-team>) CURRENT  
 ([HTTPS://JURNAL.UMJ.AC.ID/INDEX.PHP/IJCEI/ISSUE/CURRENT](https://jurnal.umj.ac.id/index.php/ijcei/issue/current)) ARCHIVES  
 ([HTTPS://JURNAL.UMJ.AC.ID/INDEX.PHP/IJCEI/ISSUE/ARCHIVE](https://jurnal.umj.ac.id/index.php/ijcei/issue/archive))

## Editor in Chief

Mohammad Imamuddin, ST, MT, University of Muhammadiyah Jakarta, Indonesia

## Peer Reviewer

Prof. Dr. Ir. Bambang Soenarto, Dipl., University Tama Jagakarsa, Indonesia  
Prof. Dr. Ir. Mudjiastuti Handajani, MT, University of Muhammadiyah Surakarta, Indonesia  
Abdul Halim Hamdany, ST, MSc, PhD, Nanyang Technological University, Singapore  
Iswandaru Widyatmoko, PhD, CEng, FCIHT FIAT, Sheffield Hallam University, United Kingdom  
Dr. Alfredo Satyanaga, BEng, MSc, PhD, Nazarbayev University, Kazakhstan

## Editor Staff

Ir. Trijetti, MT, University of Muhammadiyah Jakarta, Indonesia  
Tanjung Rahayu Raswitaningrum, ST, MT, University of Muhammadiyah Jakarta, Indonesia  
Ir. Haryo Koco Buwono, MT, University of Muhammadiyah Jakarta, Indonesia  
Andika Setiawan, ST, MT, University of Muhammadiyah Jakarta, Indonesia  
Budi Satiawan, ST, MT, University of Muhammadiyah Jakarta, Indonesia  
Harwidyo Eko Prasetyo, ST, MT, University of Muhammadiyah Jakarta, Indonesia  
Anwar Ilmar Ramadhan, ST, MT, University of Muhammadiyah Jakarta, Indonesia  
Leceyanti Aripurnomo, ST, University of Muhammadiyah Jakarta / Magazine "Lintas" Minister For Public Works and Human Settlements, Indonesia

## Creative Design and Web Administrator

Riyadi Riyadi, ST, University of Muhammadiyah Jakarta, Indonesia  
Hunafa Hunafa, ST, University of Muhammadiyah Jakarta, Indonesia

## International Journal of Civil Engineering and Infrastructure (IJCEI) Indexing By:



(<https://scholar.google.com/citations?hl=id&user=ivgUmEYAAAAJ>)

Copyright of International Journal of Civil Engineering and Infrastructure (IJCEI) (e-ISSN: **2776-2580** (<https://issn.lipi.go.id/terbit/detail/1615269579>)).



(<http://www.crossref.org>)



(<http://creativecommons.org/licenses/by-nc/4.0/>).

This work is licensed under a [Creative Commons Attribution-NonCommercial 4.0 International License](https://creativecommons.org/licenses/by-nc/4.0/) (<https://creativecommons.org/licenses/by-nc/4.0/>).

OPEN JOURNAL SYSTEMS  
([HTTP://PKP.SFU.CA/OJS/](http://pkp.sfu.ca/ojs/))

Journal Help

### USER

Username   
 Password   
 Remember me

### NOTIFICATIONS

- View (<https://jurnal.umj.ac.id/index.php/ijcei/>)
- Subscribe (<https://jurnal.umj.ac.id/index.php/ijcei/>)

### LANGUAGE

#### Select Language

English

### JOURNAL CONTENT

Search Scope  
 All

#### Browse

- By Issue (<https://jurnal.umj.ac.id/index.php/ijcei/>)
- By Author (<https://jurnal.umj.ac.id/index.php/ijcei/>)
- By Title (<https://jurnal.umj.ac.id/index.php/ijcei/>)
- Other Journals (<https://jurnal.umj.ac.id/index.php/index>)
- Categories (<https://jurnal.umj.ac.id/index.php/index>)

### FONT SIZE

### INFORMATION

- For Readers (<https://jurnal.umj.ac.id/index.php/ijcei/>)
- For Authors (<https://jurnal.umj.ac.id/index.php/ijcei/>)
- For Librarians (<https://jurnal.umj.ac.id/index.php/ijcei/>)



# International Journal of Civil Engineering and Infrastructure (IJCEI)

HOME ([HTTPS://JURNAL.UMJ.AC.ID/INDEX.PHP/IJCEI/INDEX](https://jurnal.umj.ac.id/index.php/ijcei/index)) ABOUT  
 (HTTPS://JURNAL.UMJ.AC.ID/INDEX.PHP/IJCEI/ABOUT) LOGIN  
 (HTTPS://JURNAL.UMJ.AC.ID/INDEX.PHP/IJCEI/LOGIN) REGISTER

(HTTPS://JURNAL.UMJ.AC.ID/INDEX.PHP/IJCEI/USER/REGISTER) CATEGORIES  
 Home (<https://jurnal.umj.ac.id/index.php/ijcei/index>) SEARCH/CATEGORIES) SEARCH  
 (https://jurnal.umj.ac.id/index.php/ijcei/issue/archive) > **Vol 1, No 2 (2021)**  
 (https://jurnal.umj.ac.id/index.php/ijcei/issue/view/7609/show-arch) CURRENT  
 (HTTPS://JURNAL.UMJ.AC.ID/INDEX.PHP/IJCEI/ISSUE/CURRENT) ARCHIVES  
 (HTTPS://JURNAL.UMJ.AC.ID/INDEX.PHP/IJCEI/ISSUE/ARCHIVE)

Vol 1, No 2 (2021)

## IJCEI Volume 1 No. 2

### Table of Contents

#### Articles

- NUMERICALLY PREDICTING SETTLEMENTS OF WASTE COCONUT FIBER (WCF) MIXED FLEXIBLE PAVEMENT IN HOMOGENEOUS SANDY SOIL BY USING PLAXIS 3D** ([HTTPS://JURNAL.UMJ.AC.ID/INDEX.PHP/IJCEI/ARTICLE/VIEW/9518](https://jurnal.umj.ac.id/index.php/ijcei/article/view/9518))  
 (https://jurnal.umj.ac.id/index.php/ijcei/article/view/9518)  
 DOI : 10.24853/ijcei.1.2.1-5  
 (<http://dx.doi.org/10.24853/ijcei.1.2.1-5>)  
 Md. Foisal Haque
- UTILIZATION OF MADE AQUIFERS TO IMPROVE THE QUALITY OF CLEAN WATER TO DRINKING WATER** ([HTTPS://JURNAL.UMJ.AC.ID/INDEX.PHP/IJCEI/ARTICLE/VIEW/10496](https://jurnal.umj.ac.id/index.php/ijcei/article/view/10496))  
 (https://jurnal.umj.ac.id/index.php/ijcei/article/view/10496)  
 DOI : 10.24853/ijcei.1.2.6-9  
 (<http://dx.doi.org/10.24853/ijcei.1.2.6-9>)  
 Mohammad Imamuddin, Acep Hidayat
- THE PERFORMANCE OF QUEUE LENGTH OF VEHICLE ON THE ROUNDABOUT AT SELAMAT DATANG MONUMENT USING PTV VISSIM** ([HTTPS://JURNAL.UMJ.AC.ID/INDEX.PHP/IJCEI/ARTICLE/VIEW/10557](https://jurnal.umj.ac.id/index.php/ijcei/article/view/10557))  
 (https://jurnal.umj.ac.id/index.php/ijcei/article/view/10557)  
 DOI : 10.24853/ijcei.1.2.10-16  
 (<http://dx.doi.org/10.24853/ijcei.1.2.10-16>)  
 Harwidyo Eko Prasetyo, Andika Setiawan, Trijetti Trijetti, Tanjung Rahayu, Ayu Ramadhona
- BLACKSPOT IDENTIFICATION USING AEK AND BKA METHODS ON NATIONAL ROAD IN JAVA ISLAND** ([HTTPS://JURNAL.UMJ.AC.ID/INDEX.PHP/IJCEI/ARTICLE/VIEW/12035](https://jurnal.umj.ac.id/index.php/ijcei/article/view/12035))  
 (https://jurnal.umj.ac.id/index.php/ijcei/article/view/12035)  
 DOI : 10.24853/ijcei.1.2.17-23  
 (<http://dx.doi.org/10.24853/ijcei.1.2.17-23>)  
 Shinta Novriani
- Analysis of Redundant Building Construction Material: A Case Study for A Hospital Building Project in Bogor** ([HTTPS://JURNAL.UMJ.AC.ID/INDEX.PHP/IJCEI/ARTICLE/VIEW/12034](https://jurnal.umj.ac.id/index.php/ijcei/article/view/12034))  
 (https://jurnal.umj.ac.id/index.php/ijcei/article/view/12034)  
 DOI : 10.24853/ijcei.1.2.24-34  
 (<http://dx.doi.org/10.24853/ijcei.1.2.24-34>)  
 Aditya Gilang Rakasiwi, Trijetti Trijetti, Rachmad Irwanto
- ADDITION OF SAND IN ARTIFICIAL AQUIFERS TO IMPROVE CLEAN WATER INTO DRINKING WATER** ([HTTPS://JURNAL.UMJ.AC.ID/INDEX.PHP/IJCEI/ARTICLE/VIEW/12033](https://jurnal.umj.ac.id/index.php/ijcei/article/view/12033))  
 (https://jurnal.umj.ac.id/index.php/ijcei/article/view/12033)  
 DOI : 10.24853/ijcei.1.2.35-41  
 (<http://dx.doi.org/10.24853/ijcei.1.2.35-41>)  
 Mohammad Imamuddin
- NATURAL FREQUENCY OF SKEW PLATES USING FIRST-ORDER SHEAR DEFORMATION THEORY** ([HTTPS://JURNAL.UMJ.AC.ID/INDEX.PHP/IJCEI/ARTICLE/VIEW/10712](https://jurnal.umj.ac.id/index.php/ijcei/article/view/10712))  
 (https://jurnal.umj.ac.id/index.php/ijcei/article/view/10712)  
 DOI : 10.24853/ijcei.1.2.42-53  
 (<http://dx.doi.org/10.24853/ijcei.1.2.42-53>)  
 Haryo Koco Buwono, Budiman Budiman
- THREE ARM UNSIGNALIZED INTERSECTION ON JALAN PERJUANGAN – JALAN KALIABANG BABELAN, NORTH BEKASI** ([HTTPS://JURNAL.UMJ.AC.ID/INDEX.PHP/IJCEI/ARTICLE/VIEW/12088](https://jurnal.umj.ac.id/index.php/ijcei/article/view/12088))  
 (https://jurnal.umj.ac.id/index.php/ijcei/article/view/12088)  
 DOI : 10.24853/ijcei.1.2.54-61  
 (<http://dx.doi.org/10.24853/ijcei.1.2.54-61>)  
 Ardhan Rizakdy Fauzan, Harwidyo Eko Prasetyo, Andika Setiawan, Irnanda Satya Soeratmodjo

OPEN JOURNAL SYSTEMS  
 (HTTP://PKP.SFU.CA/OJS/)

Journal Help

#### USER

Username   
 Password   
 Remember me

#### NOTIFICATIONS

- View (<https://jurnal.umj.ac.id/index.php/ijcei/>)
- Subscribe (<https://jurnal.umj.ac.id/index.php/ijcei/>)

#### LANGUAGE

Select Language

English

#### JOURNAL CONTENT

Search Scope

All

#### Browse

- By Issue (<https://jurnal.umj.ac.id/index.php/ijcei/>)
- By Author (<https://jurnal.umj.ac.id/index.php/ijcei/>)
- By Title (<https://jurnal.umj.ac.id/index.php/ijcei/>)
- Other Journals (<https://jurnal.umj.ac.id/index.php/index>)
- Categories (<https://jurnal.umj.ac.id/index.php/index>)

#### FONT SIZE

#### INFORMATION

- For Readers (<https://jurnal.umj.ac.id/index.php/ijcei/>)
- For Authors (<https://jurnal.umj.ac.id/index.php/ijcei/>)
- For Librarians (<https://jurnal.umj.ac.id/index.php/ijcei/>)

Copyright of International Journal of Civil Engineering and Infrastructure (IJCEI) (e-ISSN: **2776-2580** (<https://issn.lipi.go.id/terbit/detail/1615269579>)).



Crossref (<http://www.crossref.org>)



(<http://creativecommons.org/licenses/by-nc/4.0/>).

This work is licensed under a [Creative Commons Attribution-NonCommercial 4.0 International License](https://creativecommons.org/licenses/by-nc/4.0/) (<https://creativecommons.org/licenses/by-nc/4.0/>).



**THREE ARM UNSIGNALIZED INTERSECTION ON JALAN PERJUANGAN – JALAN KALIABANG BABELAN, NORTH BEKASI**

Ardhan Rizakdy Fauzan<sup>1</sup>, Harwidyo Eko Prasetyo<sup>2</sup>, Andika Setiawan<sup>3</sup>, Irnanda Satya Soeratmodjo<sup>4</sup>

<sup>1</sup>Civil Engineering Study Program, Muhammadiyah Jakarta University, Jl. Cempaka Putih Tengah 27, Indonesia

Email: ardanrizaldy01@gmail.com

<sup>2</sup>Civil Engineering Study Program, Muhammadiyah Jakarta University, Jl. Cempaka Putih Tengah 27, Indonesia

Correspondence email: harwidyo.eko@umj.ac.id

<sup>3</sup>Civil Engineering Study Program, Muhammadiyah Jakarta University, Jl. Cempaka Putih Tengah 27, Indonesia

Email: andika.setiawan@umj.ac.id

<sup>4</sup>Civil Engineering Study Program, Muhammadiyah Jakarta University, Jl. Cempaka Putih Tengah 27, Indonesia

Email: irnanda.satya@umj.ac.id

Received August 2, 2022 | Accepted September 24, 2022

**ABSTRACT**

*The intersection of Jalan Perjuangan - Jalan Kaliabang Babelan, North Bekasi is experiencing high traffic flow. It is because the intersection area is a shopping area and a residential area so that traffic jams often occur during busy traffic jams. This research aims to see the degree of saturation and delay at the research location. This research was conducted using a method based on MKJI 1997. The results of the analysis in the morning, the maximum flow that occurs on weekdays is 5533.7 pcu / hour, the minimum flow on holidays is 3982.2 pcu / hour with the degree of saturation in the morning on holidays is 1.30 with a delay in morning in holidays is 36.1 sec / pcu, the delay in morning on working day is 5.7 sec / pcu. The results of the analysis during the day that the maximum flow occurs on holidays is 3905.6 pcu / hour, the minimum flow on working day is 3551.9 pcu / hour with the degree of saturation on holiday is 1.11, the degree of saturation on weekdays in the afternoon is 0.83 with a delay on holiday is 26.97 sec / pcu, a delay on working day is 13.48 sec / pcu. The results of the analysis in the afternoon the maximum flow occurs on weekdays of 6304.8 pcu / hour, the minimum flow on holidays is 5869.1 pcu / hour with the degree of saturation on working day is 1.84, the degree of saturation on holidays is 1.55 with a delay on working day is 0.74 sec / pcu, and delay on holidays is 1.08 sec / pcu*

**Keywords:** T-intersection, road capacity, degree of saturation

**1. PRELIMINARY**

The development of transportation in the city of Bekasi has an impact on increasing

the flow of people, goods, and services. It also demands an increase in transportation facilities and infrastructure in the city of

Bekasi. The increase in the number of vehicles that is not matched by the development of infrastructure will lead to conflicts on roads, especially at intersections or roundabouts. Now days, on the road to downtown Bekasi at busy hours there is often a traffic rush that influence the road performance.

Bekasi is part of the Jabodetabek Metropolitan Area, with a population of Bekasi in 2020 of 3,083,644 people (Central Statistics Agency Report 2020).

The intersection is a critical area on a road, which is a point of conflict and place of congestion due to the meeting of two or more segments.

The T-intersection of Jl. Perjuangan – Jl. Kaliabang Babelan, Bekasi Utara is the meeting point of the road segments among Jl. Perjuangan / Musholla Nurul 2 lines from the North, Jl. Kaliabang / Kenzi Motor 2 lines from the East to the West, Jl. Lingkar Utara / Bintang Sport Center 2 lines from the East to the West. Its parts of Bekasi regency that connect to the city centre. At the peak hours often occurs delays and vehicle queue because there is no sidewalk for pedestrian and people use driving to do the commuting activities.

Based on the situation, T-intersection at Jl. Perjuangan – Jl. Kaliabang needs attention by providing road infrastructure that help to solve traffic problems with the degree of saturation  $>0,85$  (saturated) to avoid conflicts and reduce the number of accidents that occur at the intersection. One of the efforts is to reduce the width of the shoulder of the road, to widen the road segment. The other's alternative is using the traffic signal on the T-intersection at Jalan Perjuangan – Jalan Kaliabang Babelan, North Bekasi.

Therefore, it is necessary to conduct the research that specifically discuss about the unsignalized T-intersection of Jalan Perjuangan - Jalan Kaliabang to determine the performance of the intersection. So, it is expected that the T-intersection can serve traffic flow optimally and the road users who pass at the intersection will feel safe.

## **2. THEORETICAL BASIS**

Intersection is roads meeting from a transverse direction where vehicles intersect. The problems that exists at intersection are the capacity of roads and flow of vehicle. It is because increases the volume of vehicles and other road users such as pedestrians, sidewalks, vehicle parking and buildings. The intersection requires regulation in order to avoid and minimize conflicts or problems that may arise in the intersection area.

There are several terms used for unsignalized intersections, namely:

### **Geometric conditions**

In sketching a good geometric pattern, an intersection should be described clearly and in detail with information about curbs, road widths, shoulder widths, and medians. At the intersection of the major road approach, the road that is considered the most important, for example the road with the highest functional classification, is given the notation A and B, and for the minor road approach given the notation C and D and made clockwise.

### **Environmental conditions**

Environmental conditions are adjusted to the real facts that will affect the performance of an intersection. Environmental conditions consist of City Size Class, Road Environment Type and Side Barrier Class.

### **Traffic conditions**

Traffic condition input data consists of three parts, including describing traffic conditions, traffic flow sketches and traffic input variables which are inputted into the USIG I form as described below:

1. Periods and questions (alternative).
2. A sketch of the traffic flow depicting the various movements. Traffic flow in units of vehicles/hour. If traffic flow is in Daily Traffic or Average Annual traffic, the factor for convection to hourly flows must be recorded.
3. Traffic composition is recorded.
4. The flow of non-motorized vehicles is recorded.

### 3. RESEARCH METHOD

The method used in this research are guided by the 1997 Indonesian Road Capacity Manual (MKJI) method. In this study at the location of the Unsignalized T-Intersection on Jalan Boulevard – Jalan Kaliabang Babelan, North Bekasi, that connecting Bekasi Regency with Bekasi city center which has been clarified in UU No. 22 of 2009 that concern about road traffic and transportation has a strategic role in supporting development and national integration as part of efforts to promote public welfare. Use of traffic lights to reduce accidents on vehicles at unsignalized intersections so it become signalized intersections.

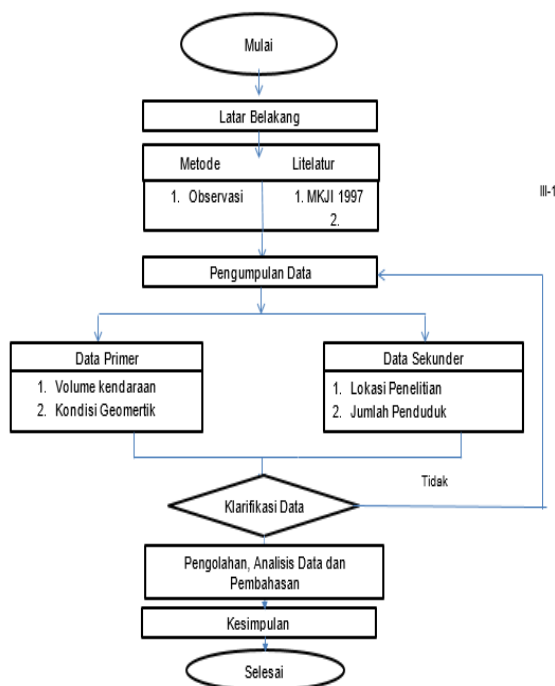


Figure 1. Flowchart of the study

This research was conducted in 3 zones, the direction of the Nurul Ghair Mosque, Kenzi Motor and the Bintang Sport Center which is a mall, office, and dining area that has been equipped with shop houses and parking lots for both motorbikes and cars.

Based on the data that will be obtained from the survey, includes:

1. Traffic Volume

2. Geometric Condition

3. Environmental Conditions

The data that will be taken at the research site, then processed into Microsoft Excel format so that it can be stored and understood into the form of tables and graphs for analysis.

The steps are as follows:

1. Data on traffic volume are tabulated with 15 minutes intervals, then converted to units of pcu/hour.
2. Data on geometric conditions at the research location as discussed.
3. Data on environmental conditions as discussed.
4. The data that has been obtained is arranged in the form of tables and analyzed using Microsoft Excel application to find out the percentage of capacity, adjustment factors, degrees of saturation, delays, and queuing opportunities at the location.

The effective time that has been determined in conducting the research is Monday, Thursday, and Saturday, for the implementation at the research site to be carried out in October 2020. Those days were chosen because they represent working days I & II and holidays. Data collection at the research site includes the morning activities of people working and in the afternoon is taken because the community has finished carrying out work and other activities.

Quantitative Analysis Techniques is a technique used to analyze quantitative information (data that can be measured, tested and informed in the form of equations and tables).

### 4. RESULTS AND DISCUSSION

Site observations were carried out in three sections of Jalan Perjuangan / Musholla Nurul Ghair to the north, approach, and exit. Jalan Kaliabang / Kenzi Motor to the east, approach, and exit. North Ring Road/Bintang Sport Center to the west, approach, and exit.



Geometric data collection of roads, vehicle volume in the morning, afternoon, and evening at 06.00-08.00 WIB, 11.30-13.30 WIB, and 16.00-19.00 WIB, and environmental conditions.

### General Data and Geometric Condition of Urban Roads

1. Province : West Java
2. Regency : Bekasi
3. District : Babelan
4. Population: 3.083 million in 2020 based on the Central Statistics Agency (BPS) Bekasi City 2020.
5. Road lines: four-divided (4/2D).
6. Road segments: Jalan Perjuangan / Musholla Nurul Ghoir to the north, approach, and exit. Jalan Kaliabang / Kenzi Motor to the east, approach, and exit. North Ring Road/Bintang Sport Center to the west, approach, and exit.
7. Segment length: 100 meters
8. Road Section Width: 6.9 meters to the north, 12.2 meters to the east and 14.7 meters to the west.

### Volume of vehicle data

The survey is carried out to determine the volume of vehicles that pass through three sections Jalan Perjuangan / Musholla Nurul Ghoir to the north, approach, and exit. Jalan Kaliabang / Kenzi Motor to the east, approach, and exit. North Ring Road/Bintang Sport Center to the west, approach, and exit. Geometric data collection of roads, vehicle volume in the morning, afternoon, and evening at 06.00-08.00 WIB, 11.30-13.30 WIB, and 16.00-19.00 WIB.

The major road is the part of the approach of the intersection that has a larger traffic flow, and the minor road is the part of the approach of the intersection that has a smaller traffic flow. In this study, the classification of major roads is in the west and east directions while the classification of minor roads is in the north.

Table 1. Volume of vehicle on Jalan Perjuangan / Musholla Nurul Ghoir

Waktu	Arah	JENIS KENDARAAN/15MENIT			
		MC	LY	HY	UM
6.00 - 06.15	BELOK KIR	31	16	0	0
	LURUS	-	-	-	-
	LOK KANA	54	17	0	3
6.15 - 06.30	BELOK KIR	45	11	0	0
	LURUS	-	-	-	-
	LOK KANA	62	24	0	2
6.30 - 06.45	BELOK KIR	50	14	0	0
	LURUS	-	-	-	-
	LOK KANA	76	15	0	2
6.45 - 07.00	BELOK KIR	85	13	0	0
	LURUS	-	-	-	-
	LOK KANA	86	17	0	2
7.00 - 07.15	BELOK KIR	55	8	0	0
	LURUS	-	-	-	-
	LOK KANA	83	28	0	0
7.15 - 07.30	BELOK KIR	57	10	0	0
	LURUS	-	-	-	-
	LOK KANA	77	29	0	0
7.30 - 07.45	BELOK KIR	48	4	0	0
	LURUS	-	-	-	-
	LOK KANA	83	24	2	0
7.45 - 08.00	BELOK KIR	57	7	0	0
	LURUS	-	-	-	-
	LOK KANA	81	25	0	1

Source: Analysis results

Table 2. Total volume of vehicle on Jalan Perjuangan / Musholla Nurul Ghoir

Waktu	JENIS KENDARAAN/15MENIT			SMP/15MENIT			JUMLAH	MP/JAM
	MC	LY	HY	0.5	1	1.3		
06.00-06.15	145	33	0	72.5	33	0	105.5	
06.15-06.30	107	25	0	53.5	25	0	88.5	
06.30-06.45	126	29	0	63	29	0	92	
06.45-07.00	171	30	0	85.5	30	0	115.5	401.5
07.00-07.15	138	36	0	69	36	0	105	401
07.15-07.30	134	39	0	67	39	0	106	418.5
07.30-07.45	131	29	2	65.5	28	2.6	96.1	422.6
07.45-08.00	138	32	0	69	32	0	101	408.1
JUMLAH	1090	262	2	545	262	2.6	809.6	2051.7

Source: Analysis results



Figure 2. Total volume of vehicle on Jalan Perjuangan / Musholla Nurul Ghoir

Based on Table 2 and Picture 4.6, traffic flow on Jalan Perjuangan / Musholla Nurul Ghoir towards North approach is highest at 06.45 – 07.45 with 422.6 pcu/hour and the lowest at 06.00 – 07.00 with 401 pcu/hour.



Table 3. Volume of vehicle on Jalan Perjuangan/Musholla Nurul Ghoir

Waktu	Arah	JENIS KENDARAAN/15MENIT			
		MC	LY	HY	UM
11.30 - 11.45	BELOK KIR	35	12	0	0
	LURUS	-	-	-	-
11.45 - 12.00	BELOK KIR	31	10	0	0
	LURUS	-	-	-	-
12.00 - 12.15	BELOK KIR	44	10	0	0
	LURUS	-	-	-	-
12.15 - 12.30	BELOK KIR	65	13	0	0
	LURUS	-	-	-	-
12.30 - 12.45	BELOK KIR	46	3	0	0
	LURUS	-	-	-	-
12.45 - 13.00	BELOK KIR	20	12	0	0
	LURUS	-	-	-	-
13.00 - 13.15	BELOK KIR	45	10	0	0
	LURUS	-	-	-	-
13.15 - 13.30	BELOK KIR	77	17	0	0
	LURUS	-	-	-	-
13.30 - 13.45	BELOK KIR	48	10	0	0
	LURUS	-	-	-	-
13.45 - 14.00	BELOK KIR	76	15	0	0
	LURUS	-	-	-	-

Source: Analysis results

Table 4. Total volume of vehicle on Jalan Perjuangan / Musholla Nurul Ghoir

Waktu	NIS KENDARAAN/15ME			SMP/15MENIT				MP/JA
	MC	LY	HY	0.5	1	1.3	JUMLAH	
11.30 - 11.45	113	28	0	56.5	28	0	84.5	
11.45 - 12.00	118	27	0	59	27	0	86	
12.00 - 12.15	116	27	0	58	27	0	85	
12.15 - 12.30	127	35	1	63.5	35	1.3	99.8	355.3
12.30 - 12.45	119	16	0	59.5	16	0	75.5	346.3
12.45 - 13.00	94	33	0	47	33	0	80	340.3
13.00 - 13.15	122	27	0	61	27	0	88	343.3
13.15 - 13.30	124	25	0	62	25	0	87	330.5
JUMLAH	932	218	1	466.5	218	1.3	685.8	1715.7

Source: Analysis results



Figure 3. Total volume of vehicle on Jalan Perjuangan / Musholla Nurul Ghoir

Based on Table 4 and Figure 3, traffic flow on Jalan Perjuangan / Musholla Nurul Ghoir towards North approach is highest at 11.30 –

12.30 with 355,3 pcu/hour and the lowest at 12.30 – 13.30 with 330,5 pcu/hour.

Table 5. Volume of vehicle on Jalan Perjuangan / Musholla Nurul Ghoir

Waktu	Arah	JENIS KENDARAAN/15MENIT			
		MC	LY	HY	UM
15.00 - 16.15	BELOK KIR	59	4	0	0
	LURUS	-	-	-	-
16.15 - 16.30	BELOK KIR	81	12	0	2
	LURUS	-	-	-	-
16.30 - 16.45	BELOK KIR	37	5	0	0
	LURUS	-	-	-	-
16.45 - 17.00	BELOK KIR	115	16	0	1
	LURUS	-	-	-	-
17.00 - 17.15	BELOK KIR	70	9	0	0
	LURUS	-	-	-	-
17.15 - 17.30	BELOK KIR	123	30	0	0
	LURUS	-	-	-	-
17.30 - 17.45	BELOK KIR	36	8	0	0
	LURUS	-	-	-	-
17.45 - 18.00	BELOK KIR	201	22	0	1
	LURUS	-	-	-	-
18.00 - 18.15	BELOK KIR	77	11	0	0
	LURUS	-	-	-	-
18.15 - 18.30	BELOK KIR	109	22	0	3
	LURUS	-	-	-	-
18.30 - 18.45	BELOK KIR	80	6	0	0
	LURUS	-	-	-	-
18.45 - 19.00	BELOK KIR	95	10	0	0
	LURUS	-	-	-	-
19.00 - 19.15	BELOK KIR	59	14	0	0
	LURUS	-	-	-	-
19.15 - 19.30	BELOK KIR	167	19	0	0
	LURUS	-	-	-	-
19.30 - 19.45	BELOK KIR	37	15	0	0
	LURUS	-	-	-	-
19.45 - 20.00	BELOK KIR	153	20	0	0
	LURUS	-	-	-	-
20.00 - 20.15	BELOK KIR	55	6	0	0
	LURUS	-	-	-	-
20.15 - 20.30	BELOK KIR	84	13	0	0
	LURUS	-	-	-	-
20.30 - 20.45	BELOK KIR	62	10	0	0
	LURUS	-	-	-	-
20.45 - 21.00	BELOK KIR	75	20	0	0
	LURUS	-	-	-	-
21.00 - 21.15	BELOK KIR	33	6	0	0
	LURUS	-	-	-	-
21.15 - 21.30	BELOK KIR	118	12	0	0
	LURUS	-	-	-	-
21.30 - 21.45	BELOK KIR	46	11	0	0
	LURUS	-	-	-	-
21.45 - 22.00	BELOK KIR	110	6	0	0
	LURUS	-	-	-	-

Source: Analysis results

Table 6. Total volume of vehicle on Jalan Perjuangan / Musholla Nurul Ghoir

Waktu	NIS KENDARAAN/15ME			SMP/15MENIT				MP/JA
	MC	LY	HY	0.5	1	1.3	JUMLAH	
16.00 - 16.15	140	16	0	70	16	0	86	
16.15 - 16.30	152	21	0	76	21	0	97	
16.30 - 16.45	193	39	0	96.5	39	0	135.5	
16.45 - 17.00	237	30	0	118.5	30	0	148.5	467
17.00 - 17.15	186	33	0	93	33	0	126	507
17.15 - 17.30	175	16	0	87.5	16	0	103.5	513.5
17.30 - 17.45	226	33	0	113	33	0	146	524
17.45 - 18.00	190	35	0	95	35	0	130	505.5
18.00 - 18.15	139	19	0	69.5	19	0	88.5	468
18.15 - 18.30	137	30	0	68.5	30	0	98.5	463
18.30 - 18.45	151	18	0	75.5	18	0	93.5	410.5
18.45 - 19.00	156	17	0	78	17	0	95	375.5
JUMLAH	2082	307	0	1041	307	0	1348	4234

Source: Analysis results

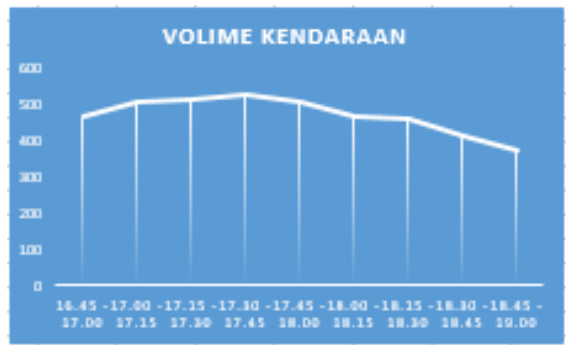


Figure 4. Total volume of vehicle on Jalan Perjuangan / Musholla Nurul Ghoir

Based on Table 6 and Figure 4 traffic flow on Jalan Perjuangan / Musholla Nurul Ghoir towards North approach is highest at 16.30 – 17.30 with 513,5 pcu/hour, and the lowest at 18.00 – 19.00 with 375,5 pcu/jam.

### Side Obstacles Analysis

Determining the class of side obstacles can be seen from the four types that effect the side obstacles. Its occurrences in every 200 meters per hour as follows:

Tabel 7. Side obstacle

no	Jenis Hambatan Samping	Jumlah
1	Pejalan Kaki	245
2	Kendaraan Berhenti	142
3	Kendaraan Keluar Masuk	76
4	Kendaraan Lambat	56

$$SFC = PED \times 0,5 + PSV \times 1,0 + ELV \times 0,7 + SMV \times 0,4$$

$$SFC = ( 245 \times 0,5 ) + ( 142 \times 1,0 ) + ( 76 \times 0,7 ) + ( 56 \times 0,4 )$$

$$SFC = 340$$

Table 8. Class of Side Obstacles

Kelas	Hambatan	Kode	Jumlah berbobot kejadian per 200 meter per jam (dua sisi)	Kondisi khusus
Sangat Rendah	VL		<100	Daerah Pemukiman : jalan dengan jalan samping
Rendah	L		100 – 299	Daerah pemukiman :beberapa kendaraan umum
Sedang	M		300 – 499	Daerah Industri : Beberapa toko di sisi jalan
Tinggi	H		500 – 899	Daerah Komersil : Aktifitas sisi jalan Tinggi
Sangat Tinggi	VH		>900	Daerah Komersil : Dengan aktifitas

Source: MKJI, 1997.

The results of the side obstacles analysis obtained the value of SFC = 340, the frequency of the weights was between the values of 300-499 for the side resistance class which was at the service level M, which was Medium.

### Traffic Flow at the Intersection

The traffic flow on weekdays at the intersection Jalan Perjuangan – Jalan Kaliabang Babelan, North Bekasi in the morning.

Tabel 9. Total volume of approach vehicles at unsignalized intersection on Working Day I.

		PAGI												
		Balok Kiri(Kondfem)				Lurus(Kondfem)				Balok Kanan(Kondfem)				Totol
Kaki Simpang		MC	LV	HV	UM	MC	LV	HV	UM	MC	LV	HV	UM	
		Utara	245	35	0	0	-	-	-	-	324	96	2	2
Timur	-	-	-	-	2.417	896	24	14	248	737	16	6	4358	
Barat	219	559	23	6	1730	635	24	14	0	-	-	-	3210	
Totol		464	594	23	6	4147	1521	48	28	572	838	18	8	8279



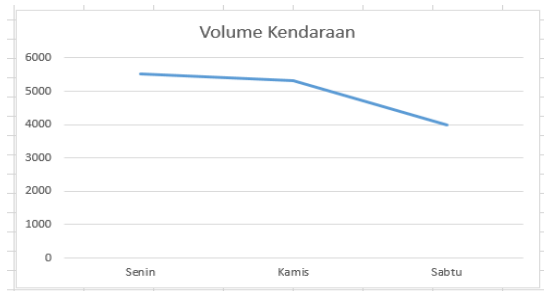


Figure 5. Recapitulation of the vehicles flow

The peak traffic flow at the intersection of Jalan Perjuang – Jalan Kaliabang Babelan, North Bekasi in the morning, occurred on Working day I at 5533.7 pcu/hour, while the lowest was on holidays at 3982.2 pcu/hour.

## 5. CONCLUSION

1. The value of the degree of saturation (DS) for the maximum flow on the working day I in the morning is 1.18. Based on the value of the degree of saturation (DS), the traffic performance on urban road has level of service F with obstructed flow, low speed, volume below the capacity, long queues, and long obstacles.
2. The delays on the intersection for the maximum flow on the working day I in the morning is 36.1 sec/pcu. The minimum flow in the morning on the holiday is 5.7 sec/pcu.
3. The probability of queuing for the maximum flow on the working day I in the morning is 56 – 183%. The probability of queuing for the minimum flow in the morning on the holiday is 70 – 229 %

## REFERENCES

- [1] Akcelik. R. 2002. *“aaSIDRA User Guide”*. Akcelik & Associates Pty Ltd. Victoria Australian
- [2] Badan Pusat Statistik. (2020). *“Statistik Kota Bekasi Tahun 2020”*. Bekasi : BPS Kota Bekasi.

- [3] Direktorat Jenderal Bina Marga, Simpang TakBersinyal.1997. *“Manual Kapasitas Jalan Indonesia (MKJI)*. Departemen Pekerjaan Umum.
- [4] Direktorat Bina Sistem Lalu Lintas dan Angkutan Kota (1997), *“Manual Kapasitas Jalan Indonesia”*, Jakarta.
- [5] Mahardika, Riyana Bani. (2019). *“Analisis Simpang Tak Bersinyal Tiga Lengan (Studi Kasus Jl. Gatot Subroto – Jl. Kesatrian Purwokerto)”*. Purwokerto: Universitas Muhammadiyah Purwokerto. *Skripsi*.
- [6] Peraturan Menteri Perhubungan Nomor PM 96 Tahun 2015 Manajemen dan Rekayasa Lalu Lintas.
- [7] Rahmanto, Dwi Yuda. (2017). *“Analisis Simpang Tiga Tak Bersinyal Kaliori-PatikRaja-Banyumas untuk 10 Tahun”*. Purwokerto: Universitas Muhammadiyah Purwokerto. *Skripsi*.
- [8] Undang – undang Republik Indonesia No.22 Tahun 2009 Tentang Lalu Lintas dan Angkutan Jalan.
- [9] Undang – undang Republik Indonesia No.22 Tahun 2009 pasal 93 Tentang Manajemen dan Rekayasa Lalu Lintas.